


ABRASIVE BLADES FOR SLAB & MASONRY SAWS

SPECIFICATIONS: C100 softest bond to C460 the hardest.

- C100 - Fast cutting of hard aggregate concrete and glazed brick
- C150 - General purpose cured concrete and medium hard brick
- C250 - Cured concrete with medium aggregate, common brick, and limestone
- C350 - Green concrete with medium aggregate, and combination brick/block
- C450 - Green concrete with soft aggregate, cement blocks, sandstone, and used brick
- C460 - Asphalt, green concrete with abrasive aggregate, long life on abrasive blocks

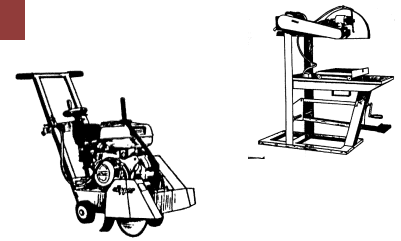

TYPE 1

Size	Max RPM	Pack	C100	C150	C450	C460
12 x 1/8 x 1	5,500	10	930038	930040	930060	
12 x 3/16 x 1	5,500	10	930028	930030	930034	930035
14 x 1/8 x 1	4,500	10	930105	930110	930125	
14 x 3/16 x 1	4,500	10	930200	930205	930220	930225
14 x 1/4 x 1	4,500	5	930298	930300	930315	930319
14 x 3/8 x 1	4,500	5	930318	930322	930327	930330
16 x 5/32 x 1	4,000	10	930400	930405	930420	
16 x 3/16 x 1	4,000	10	930429	930431	930437	930438
16 x 1/4 x 1	4,000	5	930440	930422	930448	930450
18 x 5/32 x 1	3,400	10	930500	930505	930520	
18 x 3/16 x 1	3,400	5	930538	930530	930540	930546
18 x 1/4 x 1	3,400	5	930548	930550	930560	930564
20 x 5/32 x 1	3,000	10	930596	930600	930612	
20 x 3/16 x 1	3,000	5	930648	930650	930656	930670
20 x 1/4 x 1	3,000	5	930678	930680	930686	930688

12" and 14" wheels have pin holes. For 16" and larger wheels pin holes must be specified.

RUBBING BRICKS & FLOOR STONES

Resin bonded silicon carbide to withstand rugged use. Floor stones are shipped finished sized to fit all machines.



TERRAZZO STONES

We can supply many of the popular stones for terrazzo grinding machines. Typical shapes are FW26, FW61, FW65, FR594, and FR600. See Page 27 for more information.

Size	Pack	C10	C16	C24	C80
6" x 3" x 1" with handle	1	941210	941216	941224	941280
8" x 3½" x 1½" with handle	1	941810	941816	941824	941880
2" x 2" x 4" Floor Stone	12	942210	942216	942224	942280
Wedges for Floor Stones	1	941200			